


LED BATTEN LIGHT BF45CCT


Parameters

Optical Parameters	
CCT	3000K-4000K-6500K
Lumen Output(lm)±5%	4050lm
Lumen Efficacy(LPS)±5%	90lm/W
LED Type/Qt'y	SMD 384pcs
CRI/SDCM	> 80/ < 6
Electrial Parameters	
Rated Power(w)±5%	45W
Rated/Actual Input	220-240V
Driver Ooutput Data	420V 100mA±5%
Power Factor/THD/PE	> 0.9
Driver/Connection	Integrated
Over Load/Short Circuit	Protection
Hi-pot Test Range	Non-Isolated driver, 3000Vdc/5mA/60S
Life	
Warranty	3 years
Lumen Maintenance	30000hrs
LM80	90% lumen maintance@6000hrs
Others	
IP/IK/Glow-wire	IP20/IK02/650°C
Temp./Humidity	Working:-20°C~45°C Storage:<70°C

Product Dimension

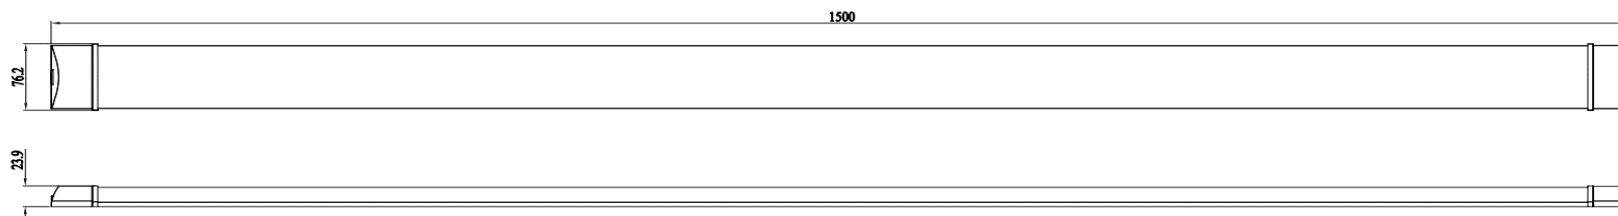

LUMINOUS INTENSITY DISTRIBUTION

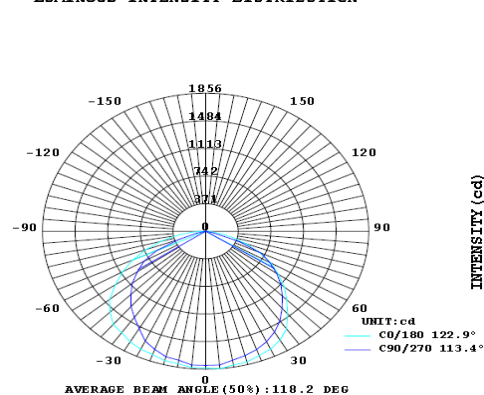

LUMINOUS INTENSITY DISTRIBUTION

