




Product		BH18ROLED	Product Dimension	
LED CEILING LIGHTING Parameters				
Optical Parameters				
CCT	3000K/4000K/6000K			
Lumen Output	1450lm/1600lm/1500lm			
Lumen Efficacy	80.5/88.8/83 lm/w			
LED Type/Qty	SMD2835/216pcs			
CRI/SCDM	>80/<6			
Electrical Parameters				
Rated Power	18W			
Rated/Actual Input	AC220/240V			
Driver Output Date	DC81V/200mA			
Driver Factory	>0.5			
Over Load/Short Circuit	Protection			
Hi-pot Test Range	3000V/5mA/60s			
Flicker metric (Pst LM)	≤1			
Stroboscopic effect metric (SVM)	≤0.4			
Life				
Warranty	30000hrs			
LuLumen maintenance	96% /3600 h			
Lm80	L70 Lifetime:>36000 hours			
Others				
IP/IK/Glow-wire	IP54/IK10/850°C			
Temp./Humidity	Working:-20°C~45°C Storage:<70°C			

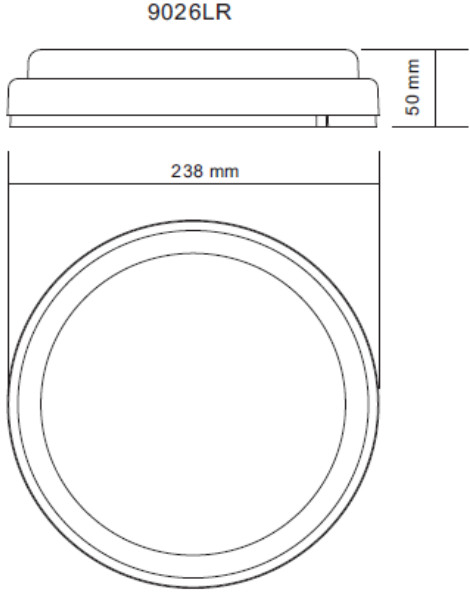

9026LR

238 mm

50 mm

