



LED Slim Wall Pack

Parameters

Optical Parameters

CCT	3000K/4000K/6000K
Lumen Output(lm)±5%	3000lm
Lumen Efficacy(LPS)±5%	100lm/W
LED Type/Qt'y	SMD 48pcs
CRI/SDCM	>80/<6

Electrical Parameters

Rated Power(w)±5%	20W/30W
Rated/Actual Input	220-240Vac
Driver Output Data	129Vdc/220mA
Power Factor/THD/PE	>0.9
Driver/Connection	Integrated
Over Load/Short Circuit	Protection
Hi-pot Test Range	SELV Isolated driver, 3000Vdc/5mA/60S


Life

Warranty	5 years
Lumen Maintenance 70%	40000hrs
LM80	97.34% lumen maintance@6000hrs


Others

IP/IK/Glow-wire	IP65/IK08 650°C
Temp./Humidity	Working:-20°C~45°C Storage:<70°C

Product Dimension

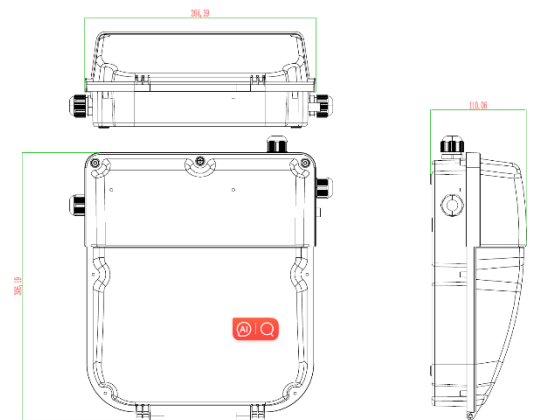

LUMINOUS INTENSITY DISTRIBUTION

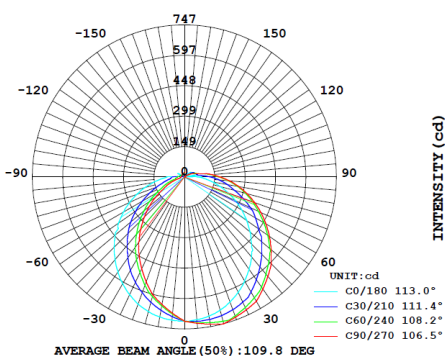

Height	AVR E	CENTER E	Diameter
1.50m	106.32lx	314.88lx	401.84cm
2.00m	59.81lx	177.12lx	535.79cm
4.00m	14.95lx	44.28lx	1071.59cm
4.50m	11.81lx	34.99lx	1205.53cm
6.00m	6.65lx	19.68lx	1607.38cm

Angle: 106.5deg

Quality LED Lighting