

## Integrated LED Emergency Downlight

### Parameters

#### Optical Parameters

CCT	6000K
Lumen Output(lm)±5%	150lm
Lumen Efficacy(LPS)±5%	75lm/W
LED Type/Qt'y	SMD 1pcs
CRI/SDCM	>80/<6

#### Electrical Parameters

Rated Power(w)±5%	2W
Rated/Actual Input	180-240Vac
Driver Output Data	3V 320mA
Power Factor/THD/PE	>0.5
Driver/Connection	Integrated
Over Load/Short Circuit	Protection
Hi-pot Test Range	SELV Isolated driver, 2000Vdc/5mA/60S




#### Life

Warranty	3 years
Lumen Maintenance 70%	30000hrs
LM80	97.34% lumen maintance@6000hrs

#### Others

IP/IK/Glow-wire	IP20/IK08/850°C
Temp./Humidity	Working:-20°C~45°C Storage:<70°C

### Product Dimension

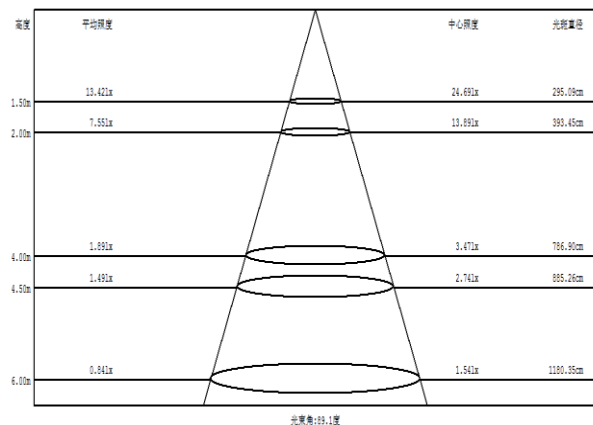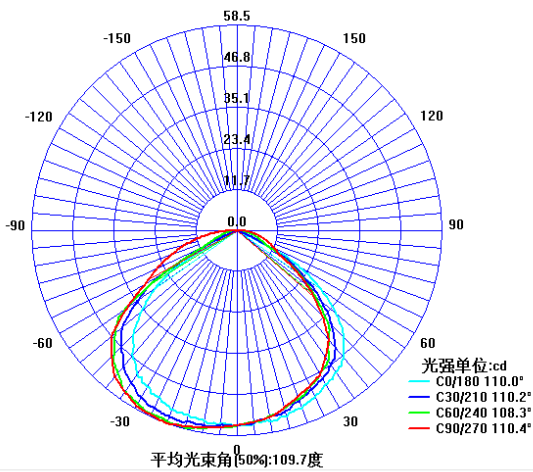

Quality LED Lighting