



LED Wall Light

Parameters

Optical Parameters

CCT	3000K/4200K/6000K
Lumen Output(lm)±5%	1350lm
Lumen Efficacy(LPS)±5%	90lm/W
LED Type/Qt'y	SMD 40pcs
CRI/SDCM	>80/<6

Electrical Parameters



Rated Power(w)±5%	15W
Rated/Actual Input	220-240Vac
Driver Output Data	170Vdc/75mA
Power Factor/THD/PE	>0.5
Driver/Connection	Integrated
Over Load/Short Circuit	Protection
Hi-pot Test Range	Non-Isolated driver, 3000Vdc/5mA/60S

Life

Warranty	2 years
Lumen Maintenance 70%	25000hrs
LM70	96% lumen maintance@6000hrs

Others

IP/IK/Glow-wire	IP65/IK08 650°C
Temp./Humidity	Working:-20°C~45°C Storage:<70°C

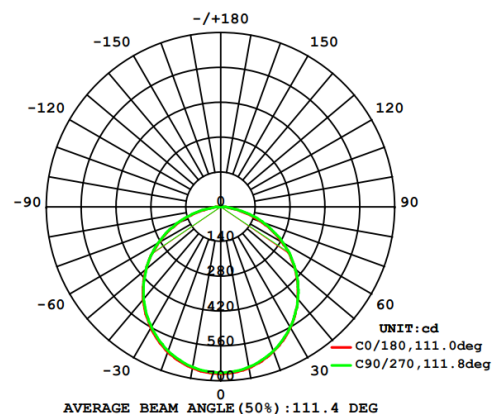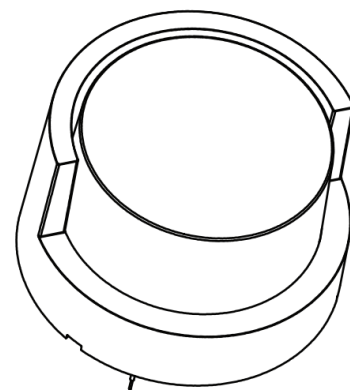

Product Dimension: 170X170X100mm



Height	Eavg, Emax	Angle: 110.18deg	Diameter
1m	127.5, 429.71x		286.61cm
2m	31.87, 107.41x		573.21cm
3m	14.16, 47.741x		859.82cm
4m	7.968, 26.861x		1146.42cm
5m	5.099, 17.191x		1433.03cm
6m	3.541, 11.941x		1719.63cm
7m	2.602, 8.7691x		2006.24cm
8m	1.992, 6.7141x		2292.84cm
9m	1.574, 5.3051x		2579.45cm
10m	1.275, 4.2971x		2866.05cm

Quality LED Lighting