



## Integrated LED Emergency Downlight

### Parameters

#### Optical Parameters

|                        |                 |
|------------------------|-----------------|
| CCT                    | 3000\4000\6000K |
| Lumen Output(lm)±5%    | 285lm           |
| Lumen Efficacy(LPS)±5% | 95lm/W          |
| LED Type/Qt'y          | SMD 30pcs       |
| CRI/SDCM               | >80/<6          |

#### Electrical Parameters

|                         |                                       |
|-------------------------|---------------------------------------|
| Rated Power(w)±5%       | 3W                                    |
| Rated/Actual Input      | 180-240Vac                            |
| Driver Output Data      | 3V 320mA                              |
| Power Factor/THD/PE     | >0.5                                  |
| Driver/Connection       | Integrated                            |
| Over Load/Short Circuit | Protection                            |
| Hi-pot Test Range       | SELV Isolated driver, 2000Vdc/5mA/60S |


#### Life

|                       |                                |
|-----------------------|--------------------------------|
| Warranty              | 5 years                        |
| Lumen Maintenance 70% | 50000hrs                       |
| LM80                  | 97.34% lumen maintance@6000hrs |


#### Others

|                 |                               |
|-----------------|-------------------------------|
| IP/IK/Glow-wire | IP44 /IK04/850℃               |
| Temp./Humidity  | Working:-20℃~45℃ Storage:<70℃ |


### Product Dimension

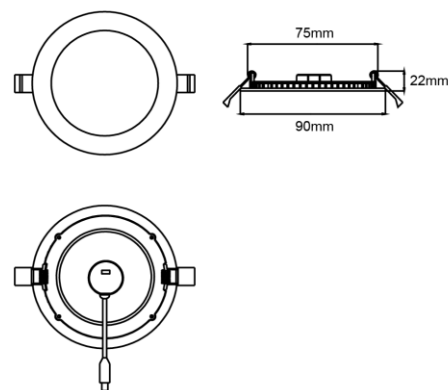

IK04 IP44

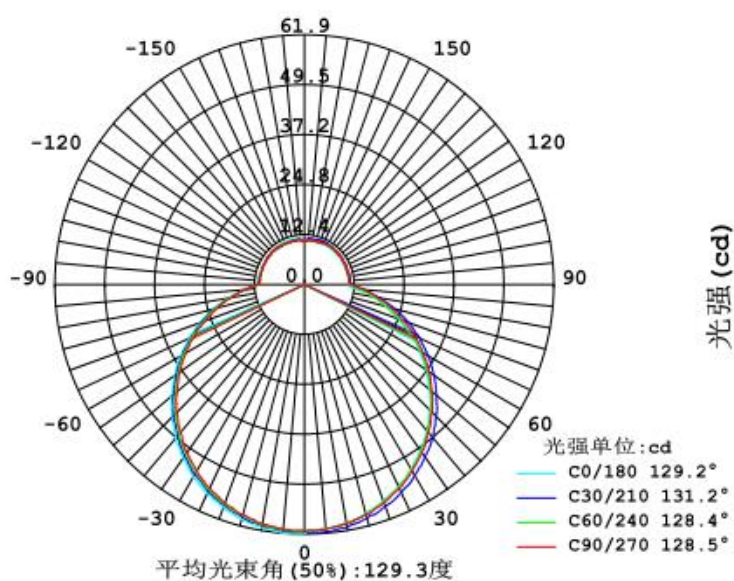

光强分布曲线

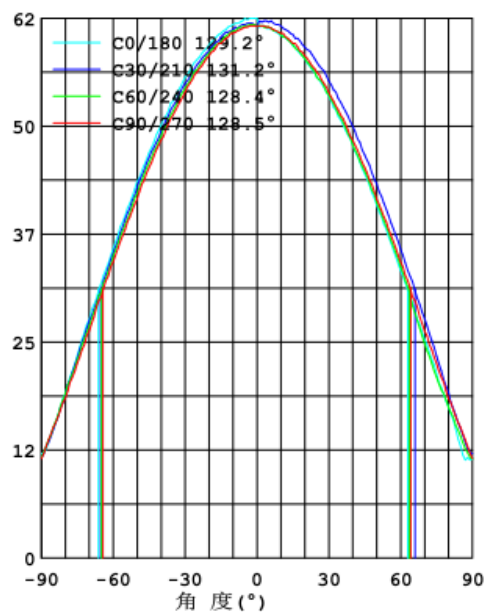

Quality LED Lighting