



Integrated LED Emergency Downlight

Parameters

Optical Parameters

CCT	3000\4000\6000K
Lumen Output(lm)±5%	570lm
Lumen Efficacy(LPS)±5%	95lm/W
LED Type/Qt'y	SMD 60pcs
CRI/SDCM	>80/<6

Electrical Parameters

Rated Power(w)±5%	6W
Rated/Actual Input	180-240Vac
Driver Output Data	3V 320mA
Power Factor/THD/PE	>0.5
Driver/Connection	Integrated
Over Load/Short Circuit	Protection
Hi-pot Test Range	SELV Isolated driver, 2000Vdc/5mA/60S


Life

Warranty	5 years
Lumen Maintenance 70%	50000hrs
LM80	97.34% lumen maintance@6000hrs


Others

IP/IK/Glow-wire	IP44 /IK04/850℃
Temp./Humidity	Working:-20℃~45℃ Storage:<70℃


Product Dimension

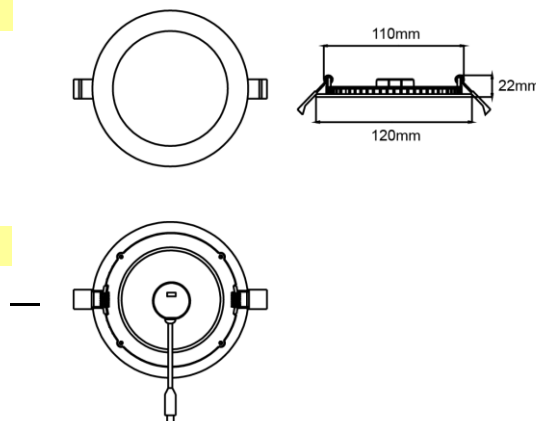

IK04 IP44

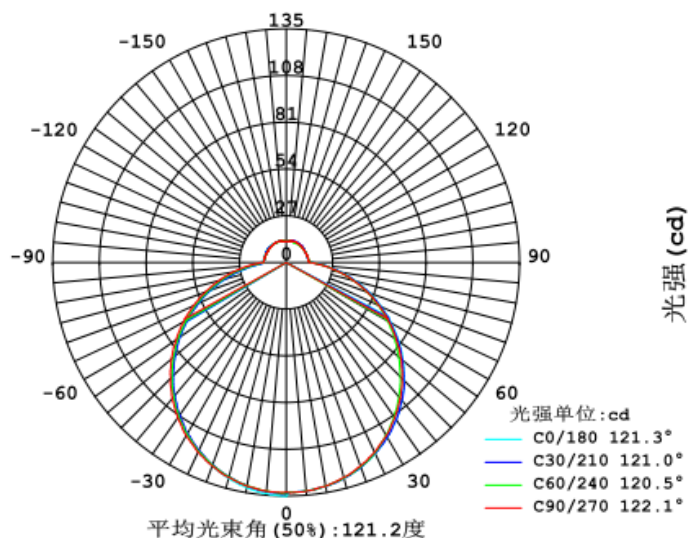

光强分布曲线

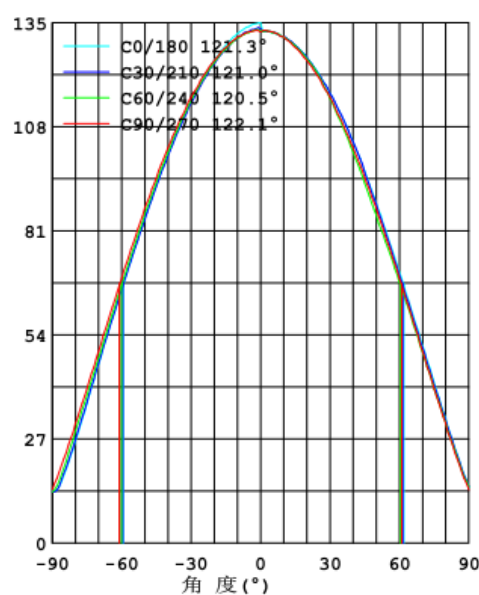

Quality LED Lighting