



LED WALL LIGHT VES11CCT

Parameters

Optical Parameters

CCT	3000K-4000K-6500K
Lumen Output(lm)±5%	580lm
Lumen Efficacy(LPS)±5%	53lm/W
LED Type/Qt'y	SMD 8pcs
CRI/SDCM	> 80/ < 6

Electrical Parameters

Rated Power(w)±5%	11W
Rated/Actual Input	100-240V
Driver Output Data	16-27VDC 300mA
Power Factor/THD/PE	> 0.5
Driver/Connection	Integrated
Over Load/Short Circuit	Protection
Hi-pot Test Range	Isolated driver, 3000Vdc/5mA/60S


Life

Warranty	3 years
Lumen Maintenance	30000hrs
LM80	96.7% lumen maintance@6000hrs

Others

IP/IK/Glow-wire	IP65/IK08/650°C
Temp./Humidity	Working:-20°C~45°C Storage:<70°C


Product Dimension

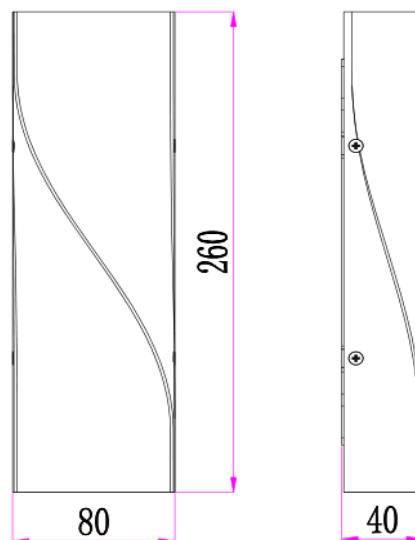

IP65



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

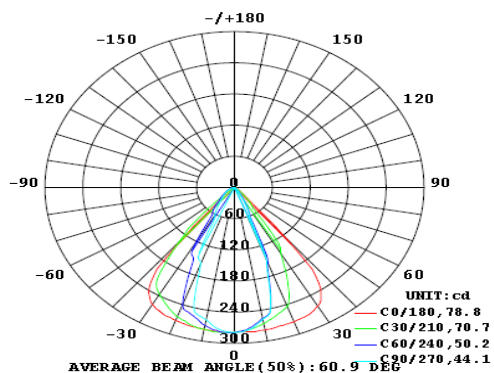

PLANAR ISOLUX DIAGRAM(UNIT:lx)

